

# Ultra-Low Humidity Dry Cabinet <1%RH

Ultra-Low Humidity Technology to comply with J-STD-033C.  
Best Drying, Storage and Monitoring Performance for MSD package




**Features:**

1. Fully automatically dehumidifying under 1% RH, it is not necessary to do the setting manually, but with stable and reliable performance.
2. LED lights are equipped inside the cabinet to make the users very easy to find the stored items.
3. High precision digitalized display. ( Precision: +/-3%RH and +/-1C )
4. With standard Humidity Manager Software V2 and RS-232 port, the temperature and relative humidity curve can be instantly read.
5. With temperature and humidity alarm function, the users can set up their desirable alarm values by themselves.

**Specifications**

Model:	D1-1200-6
Humidity Range:	<1%RH
Capacity:	1250L
Shelves:	5 shelves
Outside Dimension:	W1200*D672*H1820mm
Internal Dimension:	W1198*D642*H1625mm
Voltage:	230V

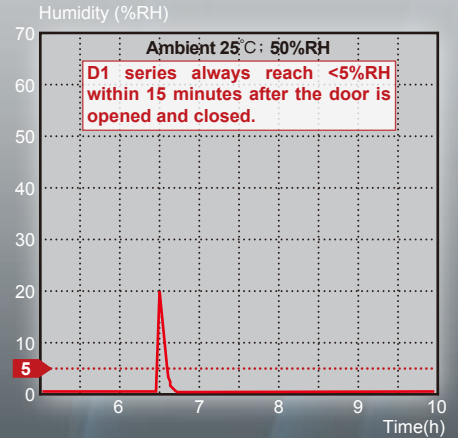

*Do not require any Nitrogen!*

# Ultra-Low Humidity Dry Cabinet <2%RH



**Specifications**

Model:	D2-157	D2-315	D2-575
Humidity Range:	<2%RH	<2%RH	<2%RH
Capacity:	165L	332L	605L
Shelves:	3 shelves	3 shelves	3 shelves
Outside Dimension:	W450xD452xH940mm	W905xD452xH940mm	W905xD800xH940mm
Internal Dimension:	W448xD442xH870mm	W903xD442xH870mm	W903xD770xH870mm
Voltage:	230V	230V	230V



**Specifications**

Model:	D2-200	D2-400	D2-600	D2-1200
Humidity Range:	<2%RH	<2%RH	<2%RH	<2%RH
Capacity:	202L	411L	624L	624L
Shelves:	2 shelves	3 shelves	5 shelves	5 shelves
Outside Dimension:	W600xD672xH632mm	W600xD672xH1027mm	W600xD672xH1710mm	W1200xD672xH1710mm
Internal Dimension:	W598xD642xH525mm	W598xD642xH1170mm	W598xD642xH1625mm	W1198xD642xH1625mm
Voltage:	230V	230V	230V	230V