


XC < 5%RH Dry Cabinet (±3%RH)

Features:

- Storage bins can help retrieving small components that are inside of the cabinet and ISO document outside. This function is widely proved to avoid tremendous human errors on the product line.
- No need to do setting for this fully automatically operated machine. Just plug and play. It can really save the labor training cost.
- The humidity level can be maintained <5%RH.
- It only takes <30 minutes to reach humidity <5%RH after the door is opened for 30 seconds and closed.

Applications:

- These kinds of ultra low dry cabinets are specially suitable for storing electrical components, biological testing agent, PCB boards, and pharmacy, etc.



Hygrometer-CP03
Accuracy: ±3%RH ; ±1°C

Function of Bins:



- 1. Classification:** Different doors can be classified by project, work sheet, order, client, component, storage life, expiration date or operator etc.
- 2. Retrieving:** Small components are stored in bins inside the parts can be retrieved quickly to avoid opening the doors frequently.
- 3. Archiving:** ISO documents such as work sheet, order, memo or quality instructions etc. can be put in bins outside the door for better QA management.



Bin-G(Optional)



Bin is inside the door.



Bin is outside the door.

Bins can be installed or replaced within 10 seconds.
Maximum loading of bin: 5kgs



※The bins are not available for XC-157, XC-315 and XC-575.



XC-1200-6G



XC < 5%RH Dry Cabinet (±3%RH)

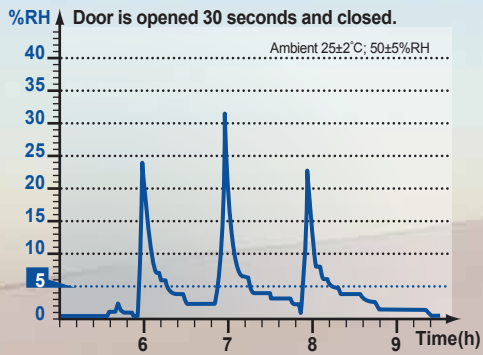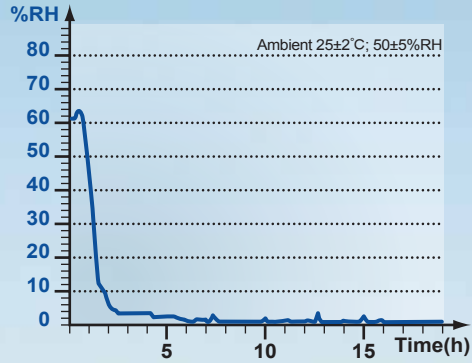

XC-157

Capacity: 164L
 Shelves: 3 shelves
 Outside Dimension: W450xD450xH1045mm
 Internal Dimension: W448xD422xH870mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-315

Capacity: 328L
 Shelves: 3 shelves
 Outside Dimension: W900xD450xH1045mm
 Internal Dimension: W898xD422xH870mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-575

Capacity: 598 L
 Shelves: 3 shelves
 Outside Dimension: W900xD800xH1045mm
 Internal Dimension: W898xD772xH870mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-200G

Capacity: 202L
 Shelves: 2 shelves
 Outside Dimension: W600xD672xH632mm
 Internal Dimension: W598xD642xH525mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-400G

Capacity: 413L
 Shelves: 3 shelves
 Outside Dimension: W600xD672xH1275mm
 Internal Dimension: W598xD642xH1070mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-600G

Capacity: 624L
 Shelves: 5 shelves
 Outside Dimension: W600xD672xH1815mm
 Internal Dimension: W598xD642xH1625mm
 Power Consumption: Max.150W ; Ave.55Wh



XC-1200-6G

Capacity: 1250L
 Shelves: 5 shelves
 Outside Dimension: W1200xD672xH1815mm
 Internal Dimension: W1198xD642xH1625mm
 Power Consumption: Max.300W ; Ave.105Wh